

XYZ COMPANY LTD.

Prepared For:
JANE DOE

XYZ et al Drumheller
100/01-02-003-04-W5/06

SURFACE FLOW & BUILDUP

PAS FILE NOT REQUIRED/REQUESTED

Belly River Formation

312.50 – 315.50 mKB MD

308.20 – 313.60 mKB TVD

Test Date: September 26 – 28, 2004


Release Date: May 5, 2008

Job No.: 06.243


Prepared by:



Surface Flow & Build Up - Plot #1

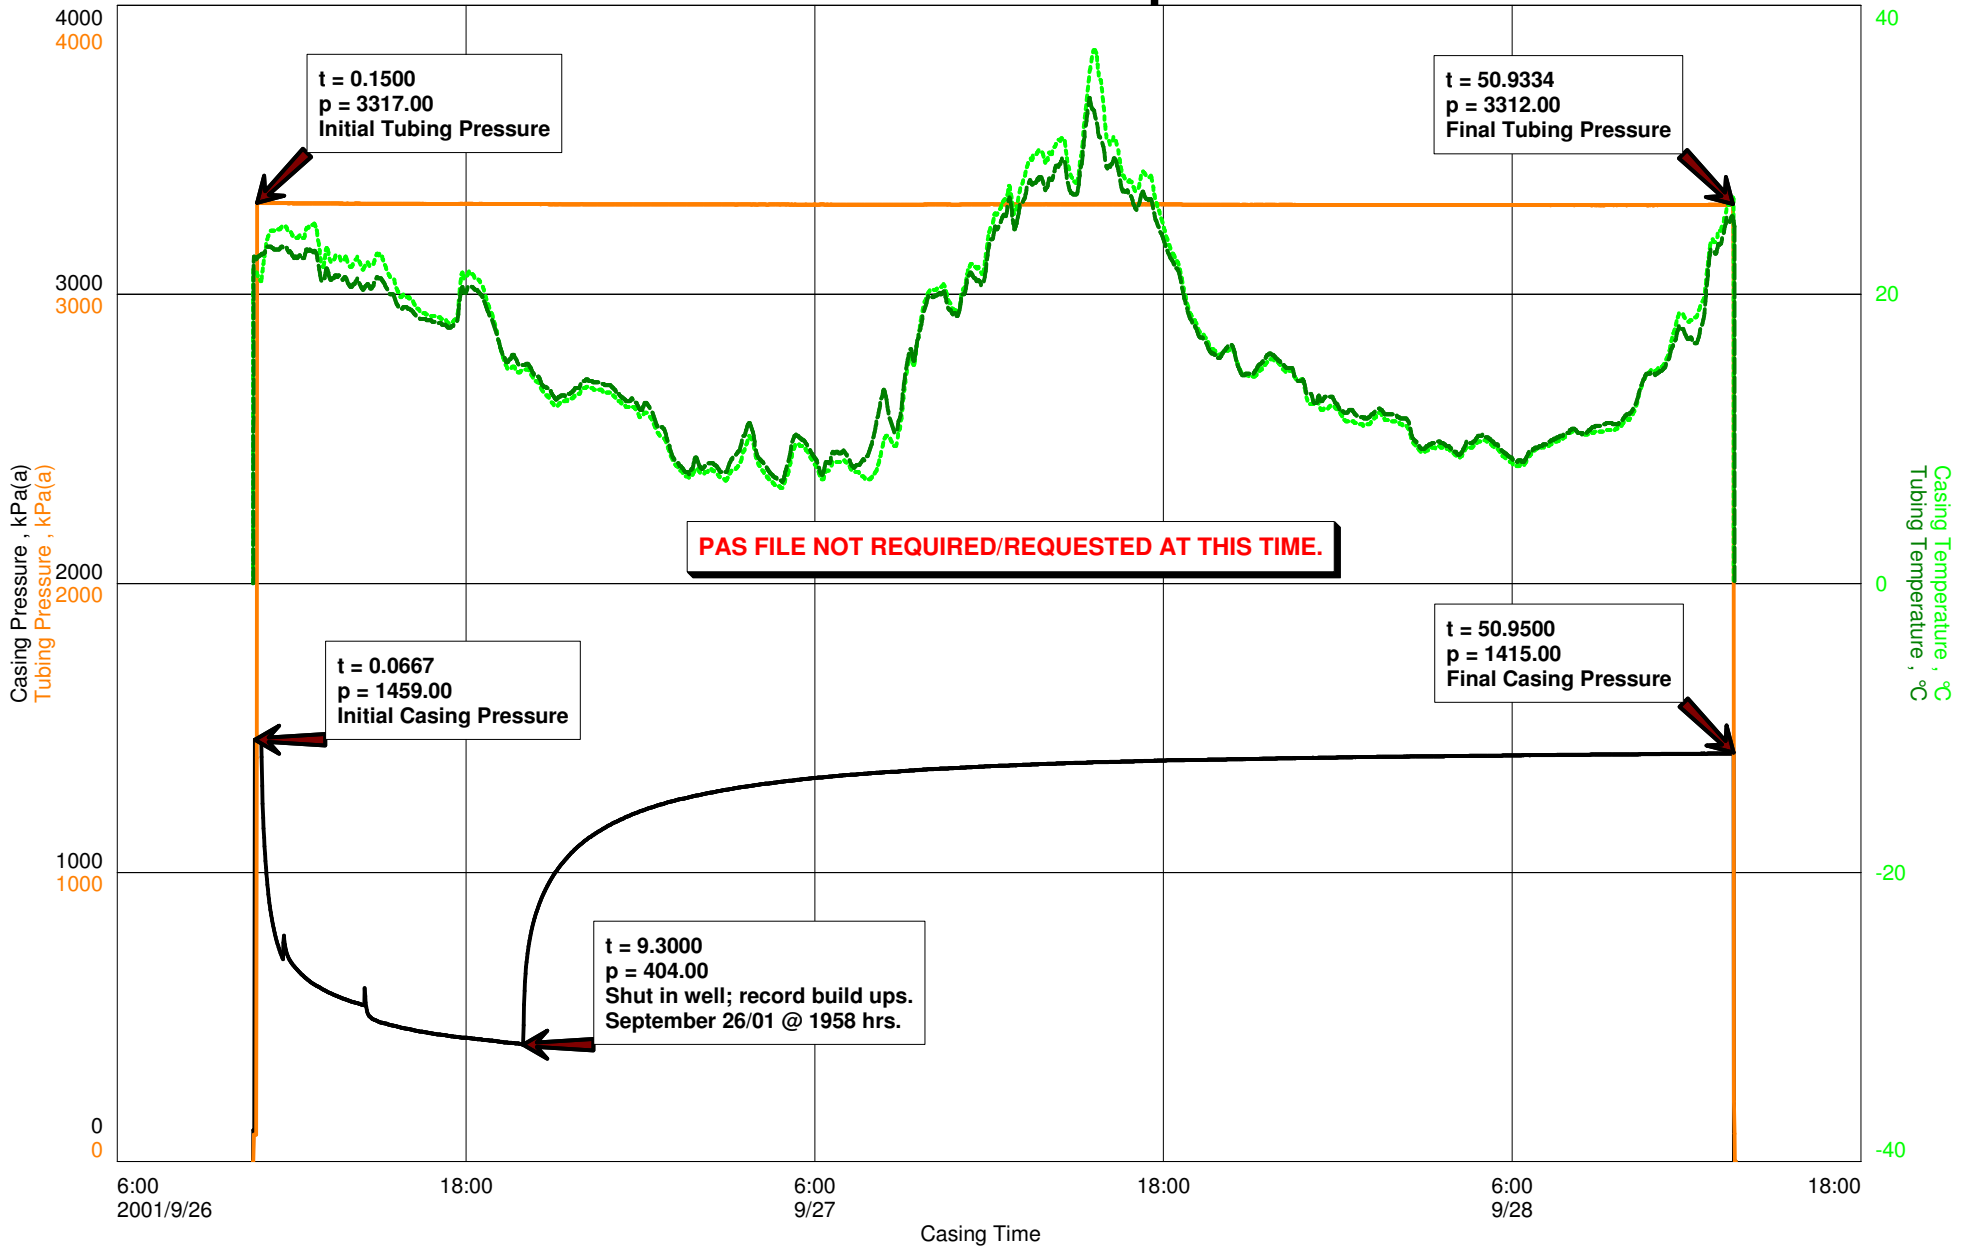

Surface Flow & Build Up - Plot #2

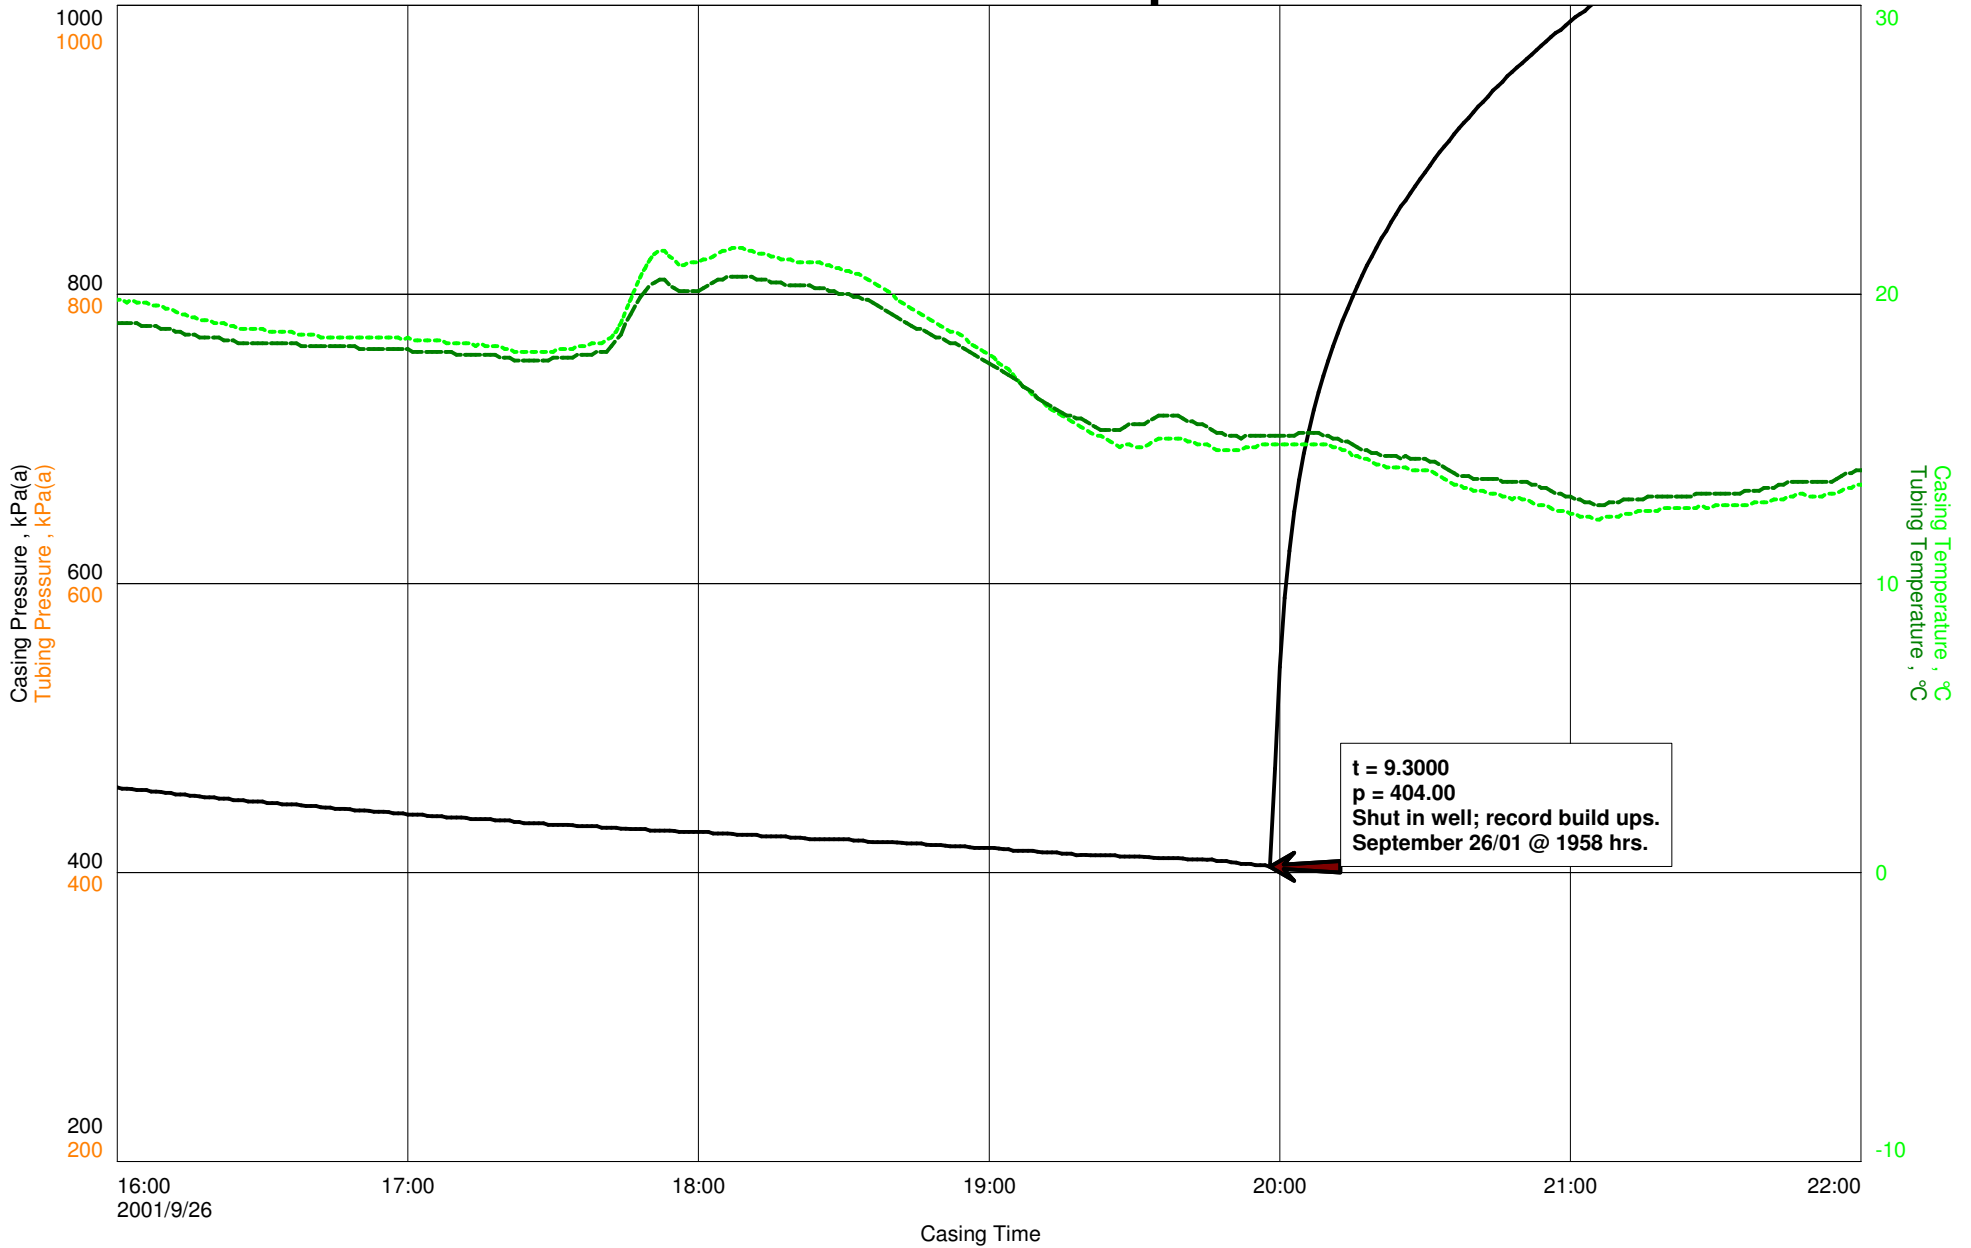

t = 9.3000
p = 404.00
Shut in well; record build ups.
September 26/01 @ 1958 hrs.

XYZ Company Ltd.
 100/01-02-003-04W5/06
 Start Test Date: 2001/09/26
 Final Test Date: 2001/09/28

XYZ et al Drumheller
 Formation: Belly River
 Pool: Unknown
 Job Number: 06.243

	Casing Date yyyy/mm/dd	Casing Clk Time hh:mm:ss	Casing Time hr	Casing Pres. kPa(a)	Casing Temp. °C	Tubing Pres. kPa(a)	Tubing Temp. °C
1	2001/09/26	10:40:00	0.0000	0.00	0.01	0.00	0.01
2	2001/09/26	11:40:00	1.0000	708.60	24.71	3316.00	23.31
3	2001/09/26	12:40:00	2.0000	620.00	24.81	3315.00	23.01
4	2001/09/26	13:40:00	3.0000	568.00	22.51	3314.20	21.21
5	2001/09/26	14:40:00	4.0000	503.00	22.01	3314.00	20.61
6	2001/09/26	15:40:00	5.0000	466.00	20.21	3314.00	19.21
7	2001/09/26	16:40:00	6.0000	446.00	18.61	3313.00	18.21
8	2001/09/26	17:40:00	7.0000	431.00	18.31	3313.00	18.01
9	2001/09/26	18:40:00	8.0000	421.00	20.01	3313.00	19.31
10	2001/09/26	19:40:00	9.0000	409.60	15.01	3312.00	15.71
11	2001/09/26	20:40:00	10.0000	926.00	13.21	3312.00	13.61
12	2001/09/26	21:40:00	11.0000	1072.00	12.81	3311.00	13.31
13	2001/09/26	22:40:00	12.0000	1148.00	13.41	3311.00	13.91
14	2001/09/26	23:40:00	13.0000	1198.00	12.21	3311.00	12.71
15	2001/09/27	00:40:00	14.0000	1234.00	10.21	3311.00	10.81
16	2001/09/27	01:40:00	15.0000	1260.00	7.31	3311.00	7.61
17	2001/09/27	02:40:00	16.0000	1281.00	7.51	3311.00	8.01
18	2001/09/27	03:40:00	17.0000	1298.00	9.71	3311.00	10.81
19	2001/09/27	04:40:00	18.0000	1311.00	6.81	3311.00	7.31
20	2001/09/27	05:40:00	19.0000	1323.00	9.31	3310.00	9.81
21	2001/09/27	06:40:00	20.0000	1333.00	8.41	3310.00	9.01
22	2001/09/27	07:40:00	21.0000	1341.00	7.41	3310.00	8.61
23	2001/09/27	08:40:00	22.0000	1348.00	9.71	3310.00	10.91
24	2001/09/27	09:40:00	23.0000	1355.00	18.41	3310.40	17.91
25	2001/09/27	10:40:00	24.0000	1361.00	19.41	3311.00	18.91
26	2001/09/27	11:40:00	25.0000	1366.00	21.81	3311.00	20.91
27	2001/09/27	12:40:00	26.0000	1370.00	27.31	3311.00	26.51
28	2001/09/27	13:40:00	27.0000	1374.20	29.81	3311.00	28.01
29	2001/09/27	14:40:00	28.0000	1378.00	29.61	3311.00	28.21
30	2001/09/27	15:40:00	29.0000	1382.00	36.81	3311.00	32.21
31	2001/09/27	16:40:00	30.0000	1384.00	28.01	3311.00	27.11
32	2001/09/27	17:40:00	31.0000	1386.00	27.11	3311.00	25.71
33	2001/09/27	18:40:00	32.0000	1388.00	20.71	3310.00	20.21
34	2001/09/27	19:40:00	33.0000	1390.40	16.21	3310.00	15.91
35	2001/09/27	20:40:00	34.0000	1392.00	14.61	3309.00	14.51
36	2001/09/27	21:40:00	35.0000	1394.00	15.51	3310.00	15.91
37	2001/09/27	22:40:00	36.0000	1396.00	14.01	3309.00	14.01
38	2001/09/27	23:40:00	37.0000	1397.00	12.11	3309.00	12.91
39	2001/09/28	00:40:00	38.0000	1399.00	11.01	3309.00	11.61
40	2001/09/28	01:40:00	39.0000	1400.40	11.31	3309.00	11.71
41	2001/09/28	02:40:00	40.0000	1401.80	9.61	3309.00	9.81
42	2001/09/28	03:40:00	41.0000	1402.00	9.31	3309.00	9.61

Casing Serial Number: Start Date: 2001/09/26 10:40:00 Run Depth:
 Tubing Serial Number: Start Date: 2001/09/26 10:40:00 Run Depth:
 Print Filter: Print every 1 hour

XYZ Company Ltd.
 100/01-02-003-04W5/06
 Start Test Date: 2001/09/26
 Final Test Date: 2001/09/28

XYZ et al Drumheller
 Formation: Belly River
 Pool: Unknown
 Job Number: 06.243

	Casing Date yyyy/mm/dd	Casing Clk Time hh:mm:ss	Casing Time hr	Casing Pres. kPa(a)	Casing Temp. °C	Tubing Pres. kPa(a)	Tubing Temp. °C
43	2001/09/28	04:40:00	42.0000	1404.00	9.51	3309.00	9.81
44	2001/09/28	05:40:00	43.0000	1404.40	8.81	3309.00	9.11
45	2001/09/28	06:40:00	44.0000	1406.00	9.01	3309.00	9.21
46	2001/09/28	07:40:00	45.0000	1407.00	10.01	3309.00	10.21
47	2001/09/28	08:40:00	46.0000	1407.40	10.31	3309.00	10.61
48	2001/09/28	09:40:00	47.0000	1408.00	10.81	3309.00	11.11
49	2001/09/28	10:40:00	48.0000	1409.00	14.41	3308.20	14.51
50	2001/09/28	11:40:00	49.0000	1410.20	18.21	3309.00	17.31
51	2001/09/28	12:40:00	50.0000	1411.00	20.81	3309.40	19.91
52	2001/09/28	13:40:00	51.0000	0.00	0.01	0.00	0.01
53	2001/09/28	13:42:00	51.0334	0.00	0.01	0.00	0.01

Casing Serial Number: Start Date: 2001/09/26 10:40:00 Run Depth:
 Tubing Serial Number: Start Date: 2001/09/26 10:40:00 Run Depth:
 Print Filter: Print every 1 hour

GENERAL INFORMATION

Client Information:

Company: XYZ Company Ltd.

Contact: Jane Doe

Phone: (403) 281-6351 Fax: (403) 281-6352 e-mail: jdoe@telusplanet.net

Site Information:

Contact: John Doe

Phone: (780) 380-0949 Fax: e-mail:

Well Information:

Name: XYZ et al Drumheller

Operator: XYZ Company Ltd.

Location-Downhole: 100/01-02-003-04W5/06

Location-Surface: Same

Test Information:

Company: Lone Wolf Solutions Ltd.

Representative: Kellie Sands

Supervisor: Casey Tucker

Test Type: Surface Flow & Build Up

Job Number: 06.243

Test Unit: 0024

Start Date: 2001/09/26

Start Time: 10:40:00

End Date: 2001/09/28

End Time: 13:43:00

Report Date: 2001/10/24

Prepared By: Lone Wolf Solutions Ltd.

Remarks:

Qualified By: Lone Wolf Solutions Ltd.

WELL INFORMATION

Well Name : XYZ et al Drumheller

Well Operator : XYZ Company Ltd.

Well Location : 100/01-02-003-04W5/06

Location-Surface : Same

Field : Drumheller

Well Type : Deviated

Pool : Unknown

Formation : Belly River

Perforation Type : Unknown		Producing Through : Casing	Size	114.30 mm
Pool Datum	m	CF	Elevation Referenced From	885.37 m
Datum Depth	m	CF	Elevation Referenced To	885.37 m
			Offset	0.00 m

Production Intervals

Production Interval & MPP Reference To : KB

MPP Pressure Reference : None

	From - m	To - m	Depth - m	Pressure - kPa
1.	312.50	315.50	1.	
2.			2.	
3.			3.	
4.			4.	
5.			5.	
6.			6.	
7.			7.	
8.			8.	
9.			9.	
10.			10.	
11.			11.	
12.			12.	

Remarks :